


Adapter NPT | internal Thread

Flange: ISO-KF, according to DIN 28403
 Leak rate: 1×10^{-9} mbar · l/s
 Surface: glass-bead blasted



Artikelnummer	Material	DN	A	B	C
016NPT1/4IG	Stainless Steel (1.4301)	DN 16	19.0	13.0	1/4" – 18NPT
016NPT1/8IG	Stainless Steel (1.4301)	DN 16	19.0	10.0	1/8" – 27NPT
025NPT1/2IG	Stainless Steel (1.4301)	DN 25	25.0	18.0	1/2" – 14NPT
025NPT1/4IG	Stainless Steel (1.4301)	DN 25	19.0	13.0	1/4" – 18NPT
025NPT1/8IG	Stainless Steel (1.4301)	DN 25	19.0	10.0	1/8" – 27NPT
025NPT1IG	Stainless Steel (1.4301)	DN 25	42.0	24.0	1" – 11 1/2 NPT
040NPT1/2IG	Stainless Steel (1.4301)	DN 40	26.0	18.0	1/2" – 14NPT
040NPT1/4IG	Stainless Steel (1.4301)	DN 40	19.0	13.0	1/4" – 18NPT
040NPT1IG	Stainless Steel (1.4301)	DN 40	26.0	23.0	1" – 11 1/2 NPT

C= thread

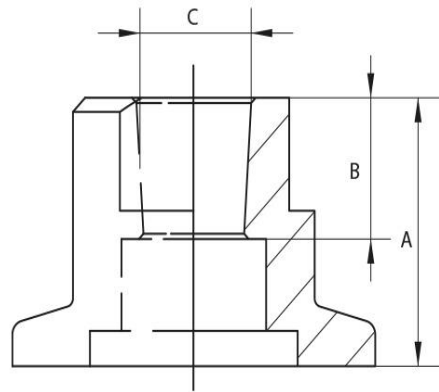

this product is compliant with both REACH and RoHS regulations