



Bellow ISO-CF

Flange: ISO-CF, according to ISO 3669
 Leak rate: 1×10^{-12} mbar · l/s
 Bakeout temperature: up to 400°C
 Max pressure: DN 16 | DN 40 = max. 4 bar
 DN 63 | DN 100 | DN 160 = max 1.5 bar
 Material: - Flange | 1.4306
 - Bellow | 1.4571



Artikelnummer	Material	DN	A	B	C	D
016BCF	Stainless Steel (1.4301)	DN 16	76.0	1.5	1.5	21°
040BCF	Stainless Steel (1.4301)	DN 40	126.0	2.0	2	7,5°
063BCF	Stainless Steel (1.4301)	DN 63	139.0	2.0	2	37°
100BCF	Stainless Steel (1.4301)	DN 100	142.0	2.0	2	28°
160BCF	Stainless Steel (1.4301)	DN 160	250.0	3.0	3	16°

CF-F = non-rotatable flange CF-R = rotatable flange | B= stretch ratio, C= compression ratio, D= angular deflection

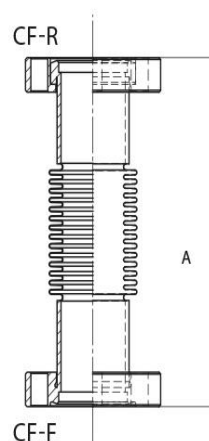

this product is compliant with both REACH and RoHS regulations