


# Hex Bolt Set with Nut

Flange: ISO-CF, according to ISO 3669  
 Leak rate:  $1 \times 10^{-12}$  mbar · l/s  
 Bakeout temperature: up to 400°C



Artikelnummer	Material	DN	A	B	C	D
016SCH	Stainless Steel (1.4301)	DN 16	20.0	3.2	25 x M4	3,5Nm
040SCH	Stainless Steel (1.4301)	DN 40	35.0	5.0	25 x M6	10 Nm
063SCH	Stainless Steel (1.4301)	DN 63	45.0	6.5	25 x M8	20 Nm
100SCH	Stainless Steel (1.4301)	DN 100	50.0	6.5	25 x M8	20 Nm
160SCH	Stainless Steel (1.4301)	DN 160	55.0	6.5	25 x M8	20 Nm
200/250CF/SCH	Stainless Steel (1.4301)	DN 200 / DN 250	60.0	6.5	25 x M8	20 Nm
300CF/SCH	Stainless Steel (1.4301)	DN 300	70.0	8.0	34 x M10	30 Nm
350CF/SCH	Stainless Steel (1.4301)	DN 350	70.0	8.0	34 x M10	30 Nm

C= pieces per set and screw size |D|= torque required

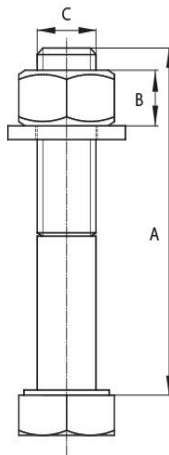

# Datasheet

this product is compliant with both REACH and RoHS regulations