


Hose Adapter for rubber hose

Flange: ISO-KF, according to DIN 28403

Leak rate: 1×10^{-9} mbar · l/s



| Artikelnummer | Material | DN | A | B | C |
|---------------|--------------------------|-------|------|-----|----|
| 016SCHW/B | Stainless Steel (1.4301) | DN 16 | 40.0 | 7.0 | 12 |
| 016SCHW/C | Aluminum | DN 16 | 40.0 | 7.0 | 12 |
| 025SCHW/B | Stainless Steel (1.4301) | DN 25 | 40.0 | 7.0 | 12 |
| 025SCHW/C | Aluminum | DN 25 | 40.0 | 7.0 | 12 |
| 040SCHW/B | Stainless Steel (1.4301) | DN 40 | 40.0 | 7.0 | 12 |
| 040SCHW/C | Aluminum | DN 40 | 40.0 | 7.0 | 12 |

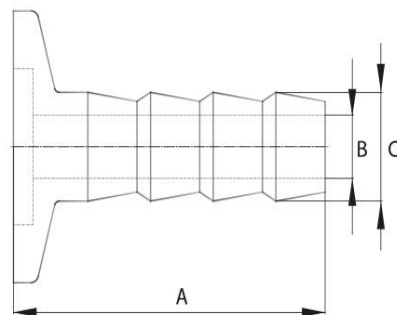

this product is compliant with both REACH and RoHS regulations