


Intermediate piece ISO-CF

Flange: ISO-CF, according to ISO 3669
 Leak rate: 1×10^{-12} mbar · l/s
 Bakeout temperature: up to 400°C
 Surface: glass-bead blasted



Artikelnummer	Material	DN	A
016ZSCF/B	Stainless Steel (1.4301)	DN 16	76.0
040ZSCF/B	Stainless Steel (1.4301)	DN 40	126.0
063ZSCF/B	Stainless Steel (1.4301)	DN 63	210.0
100ZSCF/B	Stainless Steel (1.4301)	DN 100	270.0
160ZSCF/B	Stainless Steel (1.4301)	DN 160	334.0

CF-F = non-rotatable flange CF-R = rotatable flange

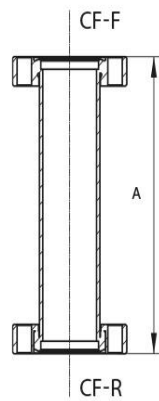

this product is compliant with both REACH and RoHS regulations