


Intermediate piece ISO-K

Flange: ISO-K, according to DIN 28404
 Leak rate: 1×10^{-9} mbar · l/s
 Surface: glass-bead blasted



| Artikelnummer | Material | DN | A |
|---------------|--------------------------|--------|-------|
| 063ZS/B | Stainless Steel (1.4301) | DN 63 | 100.0 |
| 100ZS/B | Stainless Steel (1.4301) | DN 100 | 100.0 |
| 160ZS/B | Stainless Steel (1.4301) | DN 160 | 100.0 |
| 200ZS/B | Stainless Steel (1.4301) | DN 200 | 100.0 |
| 250ZS/B | Stainless Steel (1.4301) | DN 250 | 100.0 |
| 320ZS/B | Stainless Steel (1.4301) | DN 320 | 100.0 |
| 400ZS/B | Stainless Steel (1.4301) | DN 400 | 100.0 |
| 500ZS/B | Stainless Steel (1.4301) | DN 500 | 100.0 |

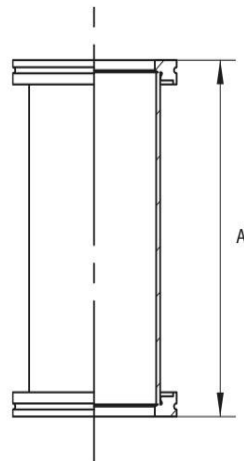

this product is compliant with both REACH and RoHS regulations