

Metal Hose ISO-KF

Flange: ISO-KF, according to DIN 28403

Leak rate: 1×10^{-9} mbar · l/s

Max pressure: max. 4 bar

Material: - Flange | 1.4301

- Bellow | 1.4404




Artikelnummer	Material	DN	A	B	C
010WS1000B	Stainless Steel (1.4301)	DN 10	1000.0	70.0	32
010WS250B	Stainless Steel (1.4301)	DN 10	250.0	70.0	32
010WS500B	Stainless Steel (1.4301)	DN 10	500.0	70.0	32
010WS750B	Stainless Steel (1.4301)	DN 10	750.0	70.0	32
016WS1000B	Stainless Steel (1.4301)	DN 16	1000.0	70.0	50
016WS1500B	Stainless Steel (1.4301)	DN 16	1500.0	70.0	50
016WS2000B	Stainless Steel (1.4301)	DN 16	2000.0	70.0	50
016WS250B	Stainless Steel (1.4301)	DN 16	250.0	70.0	50
016WS500B	Stainless Steel (1.4301)	DN 16	500.0	70.0	50
016WS750B	Stainless Steel (1.4301)	DN 16	750.0	70.0	50
025WS1000B	Stainless Steel (1.4301)	DN 25	1000.0	100.0	60
025WS1500B	Stainless Steel (1.4301)	DN 25	1500.0	100.0	103
025WS2000B	Stainless Steel (1.4301)	DN 25	2000.0	100.0	103
025WS250B	Stainless Steel (1.4301)	DN 25	250.0	100.0	60
025WS500B	Stainless Steel (1.4301)	DN 25	500.0	100.0	60
025WS750B	Stainless Steel (1.4301)	DN 25	750.0	100.0	60

Datasheet

040WS1000B	Stainless Steel (1.4301)	DN 40	1000.0	130.0	100
040WS1500B	Stainless Steel (1.4301)	DN 40	1500.0	130.0	129
040WS2000B	Stainless Steel (1.4301)	DN 40	2000.0	130.0	129
040WS250B	Stainless Steel (1.4301)	DN 40	250.0	130.0	100
040WS500B	Stainless Steel (1.4301)	DN 40	500.0	130.0	100
040WS750B	Stainless Steel (1.4301)	DN 40	750.0	130.0	100
050WS1000B	Stainless Steel (1.4301)	DN 50	1000.0	200.0	130
050WS250B	Stainless Steel (1.4301)	DN 50	250.0	200.0	130
050WS500B	Stainless Steel (1.4301)	DN 50	500.0	200.0	130
050WS750B	Stainless Steel (1.4301)	DN 50	750.0	200.0	130

B= radius multiple bending | C= radius single bending

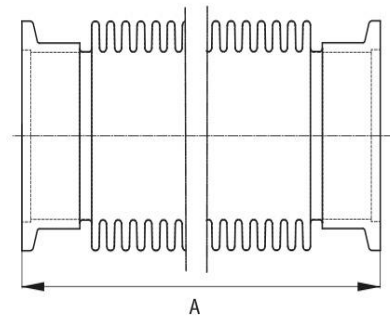

this product is compliant with both REACH and RoHS regulations