


Reducer ISO-CF

Flange: ISO-CF, according to ISO 3669
 Leak rate: 1×10^{-12} mbar · l/s
 Bakeout temperature: up to 400°C
 Surface: glass-bead blasted



Artikelnummer	Material	DN	A
100/40RS/CF	Stainless Steel (1.4301)	DN 40 / DN 100	75.0
100/63RS/CF	Stainless Steel (1.4301)	DN 63 - DN 100	95.0
160/100RS/CF	Stainless Steel (1.4301)	DN 100 / DN 160	105.0
40/16RS/CF	Stainless Steel (1.4301)	DN 16 / DN 40	45.0
63/40RS/CF	Stainless Steel (1.4301)	DN 40 / DN 63	75.0

CF-F = non-rotatable flange CF-R = rotatable flange

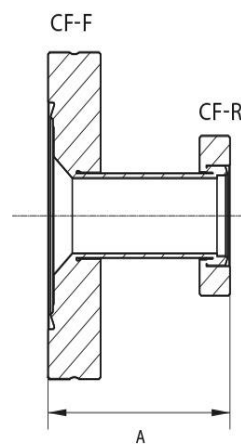

this product is compliant with both REACH and RoHS regulations