

## Reducer ISO-K


Flange: ISO-K, according to DIN 28404

Leak rate:  $1 \times 10^{-9}$  mbar · l/s

Surface: glass-bead blasted



Artikelnummer	Material	DN	A
100/63RS/B	Stainless Steel (1.4301)	DN 63 / DN 100	50.0
160/100RS/B	Stainless Steel (1.4301)	DN 100 / DN 160	50.0
200/160RS/B	Stainless Steel (1.4301)	DN 160 / DN 200	50.0
250/100RS/B	Stainless Steel (1.4301)	DN 100 / DN 250	50.0
250/160RS/B	Stainless Steel (1.4301)	DN 160 / DN 250	50.0
250/200RS/B	Stainless Steel (1.4301)	DN 200 / DN 250	50.0
250/63RS/B	Stainless Steel (1.4301)	DN 63 / DN 250	50.0

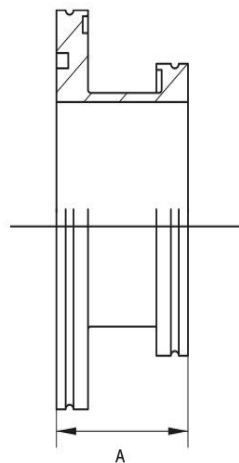

this product is compliant with both REACH and RoHS regulations