


# Reducing Centering Ring

Flange: ISO-KF, according to DIN 28403  
 Leak rate:  $1 \times 10^{-9}$  mbar · l/s



Artikelnummer	Material	DN	A	B	C	D	E
10/16RZ/BV	Stainless Steel / FPM	DN 10 / DN 16	17.0	10.0	12	8	3.9
10/16RZ/CN	Aluminum / NBR	DN 10 / DN 16	17.0	10.0	12	8	3.9
10/16RZ/CV	Aluminum / FPM	DN 10 / DN 16	17.0	10.0	12	8	3.9
20/25RZ/BV	Stainless Steel / FPM	DN 20 / DN 25	26.0	20.0	22	8	3.9
20/25RZ/CN	Aluminum / NBR	DN 20 / DN 25	26.0	20.0	22	8	3.9
20/25RZ/CV	Aluminum / FPM	DN 20 / DN 25	26.0	20.0	22	8	3.9
32/40RZ/BV	Stainless Steel / FPM	DN 32 / DN 40	41.0	32.0	34	8	3.9
32/40RZ/CN	Aluminum / NBR	DN 32 / DN 40	41.0	32.0	34	8	3.9
32/40RZ/CV	Aluminum / FPM	DN 32 / DN 40	41.0	32.0	34	8	3.9

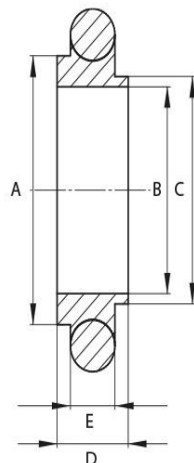

# Datasheet

this product is compliant with both REACH and RoHS regulations