


Reducing Cross

Flange: ISO-KF, according to DIN 28403
 Leak rate: 1×10^{-9} mbar · l/s
 Surface: glass-bead blasted



Artikelnummer	Material	DN	A	B
25/16RKS/B	Stainless Steel (1.4301)	DN 25	70.0	70.0
25/16RKS/C	Aluminum	DN 25	70.0	70.0
40/16RKS/B	Stainless Steel (1.4301)	DN 40	80.0	90.0
40/16RKS/C	Aluminum	DN 40	80.0	90.0
50/16RKS/B	Stainless Steel (1.4301)	DN 50	100.0	100.0

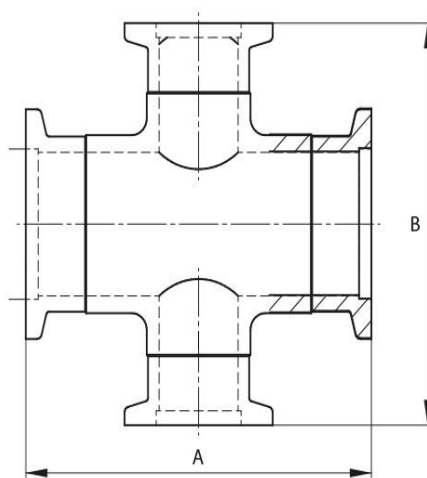

this product is compliant with both REACH and RoHS regulations