


Replacement O-Ring

Flange: ISO-KF, according to DIN 28403

Leak rate: 1×10^{-9} mbar · l/s



Artikelnummer	Material	DN	A	B
010OR/N	NBR	DN 10	15.0	5.0
010OR/V	FPM	DN 10	15.0	5.0
016OR/N	NBR	DN 16	18.0	5.0
016OR/V	FPM	DN 16	18.0	5.0
025OR/N	NBR	DN 25	28.0	5.0
025OR/V	FPM	DN 25	28.0	5.0
040OR/N	NBR	DN 40	42.0	5.0
040OR/V	FPM	DN 40	42.0	5.0
050OR/N	NBR	DN 50	55.0	5.0
050OR/V	FPM	DN 50	55.0	5.0
063OR/N	NBR	DN 63	75.6	5.3
063OR/V	FPM	DN 63	75.6	5.3
1000OR/V	FPM	DN 1000	1006.0	7.0
100OR/N	NBR	DN 100	107.3	5.3
100OR/V	FPM	DN 100	107.3	5.3
160OR/N	NBR	DN 160	158.1	5.3
160OR/V	FPM	DN 160	158.1	5.3
200OR/N	NBR	DN 200	208.9	5.3
200OR/V	FPM	DN 200	208.9	5.3
250OR/N	NBR	DN 250	253.4	5.3
250OR/V	FPM	DN 250	253.4	5.3
320OR/N	NBR	DN 320	329.6	7.0
400OR/N	NBR	DN 400	405.3	7.0
400OR/V	FPM	DN 400	405.3	7.0
500OR/N	NBR	DN 500	506.9	7.0
500OR/V	FPM	DN 500	506.9	7.0
630OR/N	NBR	DN 630	658.9	7.0
630OR/V	FPM	DN 630	658.9	7.0
800OR/V	FPM	DN 800	808.0	7.0

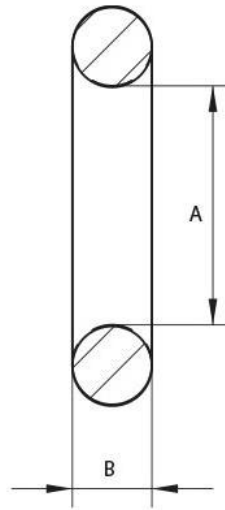

this product is compliant with both REACH and RoHS regulations