

Viewport ISO-CF

Flange: ISO-CF, according to ISO 3669

Leak rate: 1×10^{-12} mbar · l/s

Bakeout temperature: up to 400°C


Max pressure: max 2 bar

Max pressure at 400°C: max 1 bar



Artikelnummer	Material	DN	A	B
016SG/CF-F	Stainless Steel / Kodial / Metall-Dichtung	DN 16	16.0	12.0
040SG/CF-F	Stainless Steel / Kodial / Metall-Dichtung	DN 40	38.0	13.0
063SG/CF-F	Stainless Steel / Kodial / Metall-Dichtung	DN 63	63.0	18.0
100SG/CF-F	Stainless Steel / Kodial / Metall-Dichtung	DN 100	90.0	20.0
160SG/CF-F	Stainless Steel / Kodial / Metall-Dichtung	DN 160	135.0	22.5

CF-F = non-rotatable flange CF-R = rotatable flange

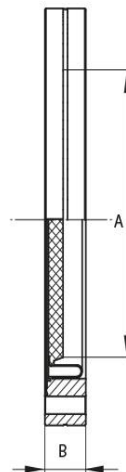

this product is compliant with both REACH and RoHS regulations